

Graphic Paper

LEIPA HYBRID

Tiefdruckfähig | Suitable for HSWO and RG printing

Ihr direkter Kontakt zu dem LEIPA Vertriebsteam für Fragen, Informationen und Musterbestellungen:

Your direct contact to the LEIPA Sales Team for questions, information and sample orders:

Votre équipe commerciale chez LEIPA se tient à votre entière disposition si vous aviez besoin d'informations plus détaillées ou des échantillons:

LEIPA Georg Leinfelder GmbH
Sales Team
Kuhheide 34
16303 SCHWEDT/ODER
GERMANY
t. +49 3332 24-3000
sales@leipa.com

Spezifikationen | Specification | Fiche Technique

Flächengewicht substance grammage g/m ²	Weißgrad OS brightness TS blancheur %	Opazität opacity opacité %	Rauhigkeit roughness rugosité µm	Spez. Volumen bulk main cm ³ /g
ISO 536	ISO 2470	DIN 53146	ISO 8791-4	
57	80	≥ 92	1,5	0,87

Toleranzen | tolerances | tolérances

± 4%	± 2,5		± 0,1	± 10%
------	-------	--	-------	-------

Weitere Informationen zu unseren grafischen Papieren finden Sie unter:


You can find more information about our graphic papers at:

Voulez-vous plus d'informations? Visitez notre site web sur:

www.leipa.com
Gültig ab | valid from |
valable à partir du:
01.03.2021



LEIPA

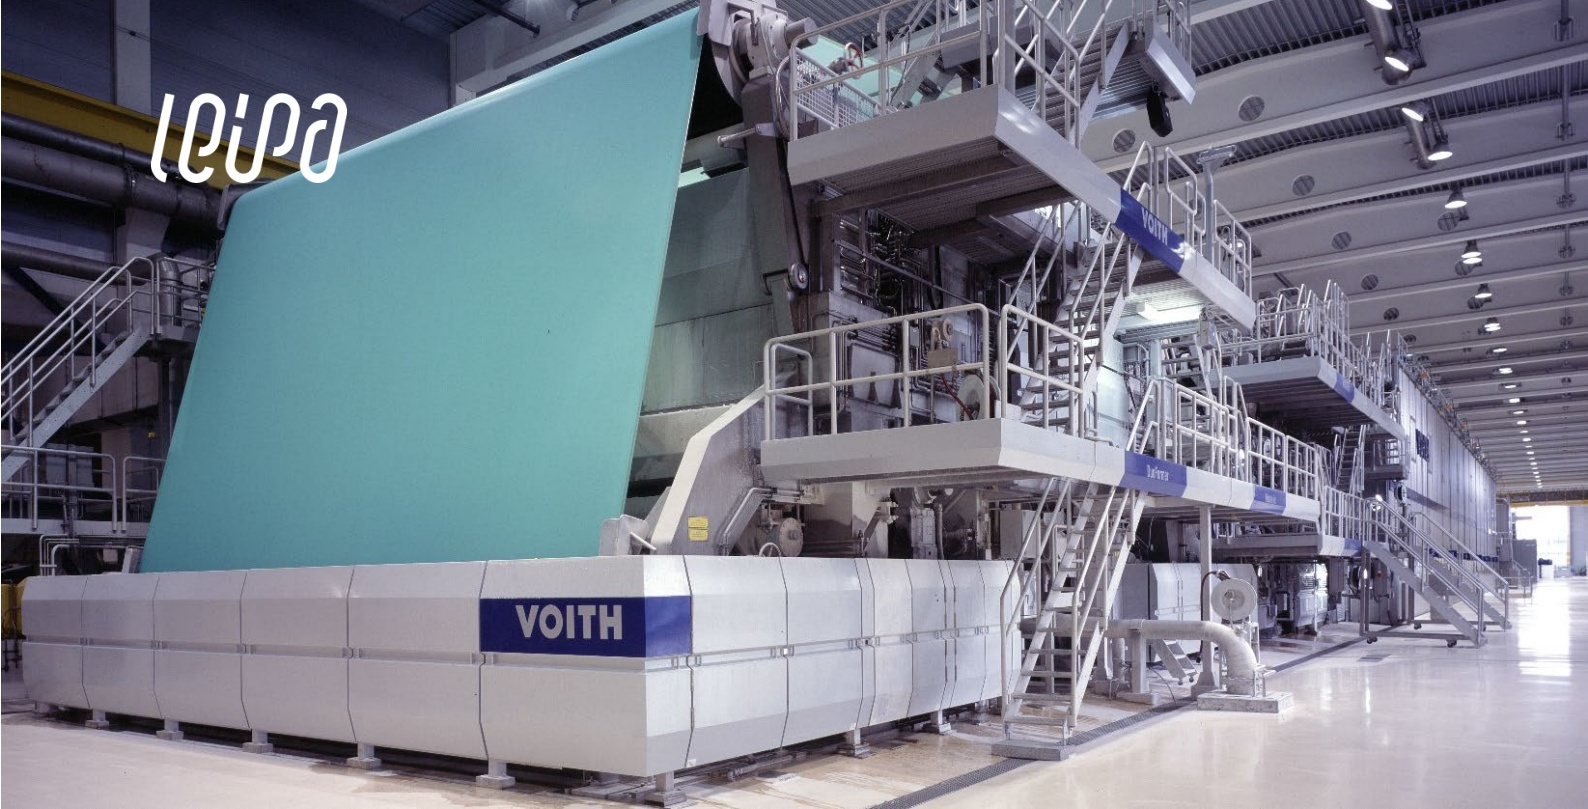

LEIPA HYBRID

Type	Light Weight Coated - Paper								
Printing process	Suitable for HSWO and RG printing								
Surface	gloss								
Pulp	100 % recycled paper								
Format	reel								
Reel diameter	120.0 cm – 125.0 cm								
Reel width	43.0 cm – 440.0 cm* * upon request								
Core diameter	<table border="1" style="border-collapse: collapse; text-align: center;"> <tr> <td style="padding: 2px;">inner:</td> <td style="padding: 2px;">76 mm</td> <td style="padding: 2px;">150 mm*</td> <td style="padding: 2px;">150 mm*</td> </tr> <tr> <td style="padding: 2px;">outer:</td> <td style="padding: 2px;">106 mm</td> <td style="padding: 2px;">176 mm</td> <td style="padding: 2px;">180 mm</td> </tr> </table> * upon request	inner:	76 mm	150 mm*	150 mm*	outer:	106 mm	176 mm	180 mm
inner:	76 mm	150 mm*	150 mm*						
outer:	106 mm	176 mm	180 mm						
Labelling	max. 2 labels per reel								
Packaging	waterproof und moisture-resistant packaging paper								
Certification and eco-label	Blue Angel, EU-Ecolabel, FSC® Chain-of-Custody, PEFC™ Chain-of-Custody, ISO 9001/14001, ISO 45001, ISO 50001, EMAS								
Recommendations for RG	A maximum screening of 63 L/cm; A deeper engraving of the cylinders; Low viscosity of the ink improves the printing results.								

